

COMPLIANCE INFORMATION

UL Listed
C-UL Listed (Canada)
CISPR/EN55022 Class A

FCC Regulations

This equipment has been tested and found to comply with the limits for a class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at the user's own expense.

Canadian Regulations

This digital apparatus does not exceed the Class A limits for radio noise for digital apparatus set out on the radio interference regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministre des Communications du Canada.

European Regulations

Warning

This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Achtung !

Dieses ist ein Gerät der Funkstörgrenzwertklasse A. In Wohnbereichen können bei Betrieb dieses Gerätes Rundfunkstörungen auftreten, in weichen Fällen der Benutzer für entsprechende Gegenmaßnahmen verantwortlich ist.

Attention !

Ceci est un produit de Classe A. Dans un environnement domestique, ce produit risque de créer des interférences radioélectriques, il appartiendra alors à l'utilisateur de prendre les mesures spécifiques appropriées.



CAUTION: RJ connectors are NOT INTENDED FOR CONNECTION TO THE PUBLIC TELEPHONE NETWORK. Failure to observe this caution could result in damage to the public telephone network.

Der Anschluss dieses Gerätes an ein öffentliches Telekommunikationsnetz in den EG-Mitgliedstaaten verstößt gegen die jeweiligen einzelstaatlichen Gesetze zur Anwendung der Richtlinie 91/263/EWG zur Angleichung der Rechtsvorschriften der Mitgliedstaaten über Telekommunikationsendeinrichtungen einschliesslich der gegenseitigen Anerkennung ihrer Konformität.

Copyright Restrictions


© 1999-2001 TRANSITION Networks.
All rights reserved. No part of this work may be reproduced or used in any form or by any means – graphic, electronic, or mechanical – without written permission from TRANSITION Networks.

Trademark Notice

All registered trademarks and trademarks are the property of their respective owners.

Printed in the U.S.A.

33137.E



Minneapolis, MN 55344 USA


10BASE-T/10BASE-FL

Slide-In-Module Media Converters

C/E-TBT-FRL-04, C/E-TBT-FRL-04(SC), C/E-TBT-FRL-04(SM), C/E-TBT-FRL-04(L),
C/E-TBT-FRL-04(MT), C/E-TBT-FRL-04(LH), C/E-TBT-FRL-04(XC)

USER'S GUIDE

The TRANSITION Networks C/E-TBT-FRL-04 10BASE-T/10BASE-FL media converters, designed to be installed in the E-MCC-1600 Media Conversion Center, connect either half-duplex or full-duplex, unshielded or shielded 10BASE-T twisted-pair copper to either half-duplex or full-duplex 10BASE-FL singlemode or multimode fiber.



C/E-TBT-FRL-04

Provides an RJ-45 unshielded twisted pair 10BASE-T connector and a set of RX (receive) and TX (transmit) ST 10BASE-FL 850nm multimode fiber connectors.

C/E-TBT-FRL-04(MT)

Provides an RJ-45 unshielded twisted pair 10BASE-T connector and an RX (receive) and TX (transmit) MT-RJ 10BASE-FL 850nm multimode fiber connector.

C/E-TBT-FRL-04 (SC)

Provides an RJ-45 unshielded twisted pair 10BASE-T connector and a set of RX (receive) and TX (transmit) SC 10BASE-FL 850nm multimode fiber connectors.

C/E-TBT-FRL-04(LH)

Provides an RJ-45 unshielded twisted pair 10BASE-T connector and a set of RX (receive) and TX (transmit) ST 10BASE-FL 1300nm singlemode fiber connectors.

C/E-TBT-FRL-04(SM)

Provides an RJ-45 unshielded twisted pair 10BASE-T connector and an RX (receive) and TX (transmit) ST 10BASE-FL 1300nm singlemode fiber connector.

C/E-TBT-FRL-04(XC)

Provides an RJ-45 unshielded twisted pair 10BASE-T connector and an RX (receive) and TX (transmit) SC 10BASE-FL 1300nm singlemode fiber connector.


C/E-TBT-FRL-04(L)

Provides an RJ-45 unshielded twisted pair 10BASE-T connector and a set of RX (receive) and TX (transmit) ST 10BASE-FL 1300nm multimode fiber connectors.

C/E-TBT-FRL-04 in the Network	.2
Installation3
Operation4
Fault Isolation and Correction	. .5
Cable Specifications6
Technical Specifications7
Compliance Information8

C/E-TBT-FRL-04 IN THE NETWORK


Use the C/E-TBT-FRL-04 media converter (or two C/E-TBT-FRL-04 media converters in pairs) to connect a workstation to a remote hub or to connect two hubs, switches, or workstations.

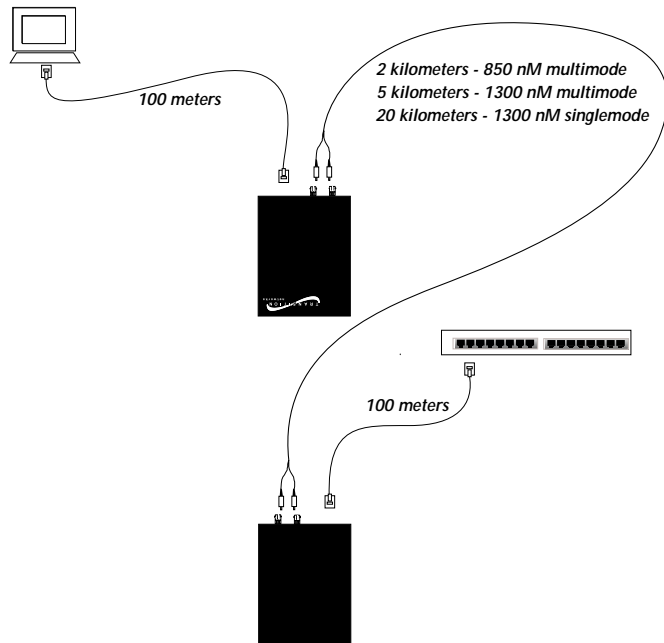

NOTE: Maximum Number of Nodes: 2 nodes

The **AutoCross™** feature allows either straight-through or crossover cables to be used when connecting to 10BASE-T devices, such as hubs, transceivers, or network interface cards (NICs). AutoCross™ determines the characteristics of the cable connection and automatically configures the unit to link up to straight-through or to crossover cable.

The **LinkALERT™** feature allows the C/E-TBT-FRL-04 media converter to pass 10BASE-T side link faults to the 10BASE-FL side and to pass 10BASE-FL side link faults to the 10BASE-T side. NOTE: An enable/disable switch allows the network administrator to disable **LinkALERT™** in the case of a network with back-to-back media converter installation in which Autonegotiation from other sources does not work properly.

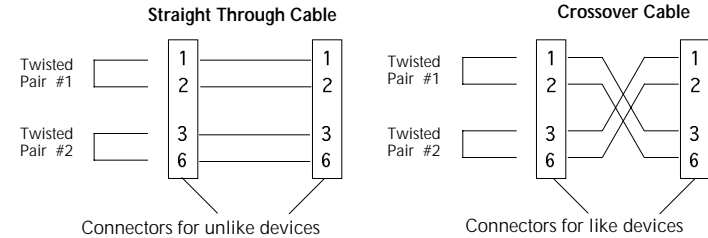

TECHNICAL SPECIFICATIONS

Standards	IEEE 802.3								
Dimensions	4.7" x 3.0" x 1.0" (119 mm x 76 mm x 25 mm)								
Environment	<table border="0"> <tr> <td>Temperature</td> <td>0 to 50°C (32° to 122° F)</td> </tr> <tr> <td>Storage Temperature</td> <td>-20 to 85°C</td> </tr> <tr> <td>Humidity</td> <td>5-95%, non condensing</td> </tr> <tr> <td>Altitude</td> <td>0-10,000 feet</td> </tr> </table>	Temperature	0 to 50°C (32° to 122° F)	Storage Temperature	-20 to 85°C	Humidity	5-95%, non condensing	Altitude	0-10,000 feet
Temperature	0 to 50°C (32° to 122° F)								
Storage Temperature	-20 to 85°C								
Humidity	5-95%, non condensing								
Altitude	0-10,000 feet								
Warranty	Lifetime								

	DECLARATION OF CONFORMITY
Name of Mfg:	Transition Networks 6475 City West Parkway, Minneapolis MN 55344 USA
Model:	C/E-TBT-FRL-04 Series 10BASE-T/10BASE-FL Media Converter
Part Number:	C/E-TBT-FRL-04, C/E-TBT-FRL-04(SC), C/E-TBT-FRL-04(SM), C/E-TBT-FRL-04(L), C/E-TBT-FRL-04(MT), C/E-TBT-FRL-04(LH), C/E-TBT-FRL-04(XC)
Regulation:	EMC Directive 89/336/EEC
Purpose:	To declare that the C/E-TBT-FRL-04 to which this declaration refers is in conformity with the following standards. EMC-CISPR 22: 1985 Class A; EN 55022: 1988 Class A; EN 50082-1:1992; EN 60950 A4:1997; IEC 801.2, IEC 801.3, and IEC 801.4; IEC 950
<i>I, the undersigned, hereby declare that the equipment specified above conforms to the above Directive(s) and Standard(s).</i>	
	<u>July 7, 1999</u>
Stephen Anderson, Vice-President of Engineering	Date

CABLE SPECIFICATIONS

The physical characteristics of the media cable must meet or exceed IEEE 802.3 specifications.

Fiber Cable

Multimode Cable Recommended: 62.5 / 125 μ m multimode fiber
Optional: 100 / 140 μ m multimode fiber

85 / 125 μ m multimode fiber
50 / 125 μ m multimode fiber
Singlemode Cable Recommended: 9/125 μ m singlemode fiber
Bit error rate: $\leq 10^{-9}$

C/E-TBT-FRL-04 850nm multimode

Fiber-optic Transmitter Power: min: -16.0 dBm max: -10.0 dBm
Fiber-optic Receiver Sensitivity: min: -29.5 dBm max: -7.2 dBm
Maximum Cable Distance: 2 kilometers (6,600 feet)

C/E-TBT-FRL-04 (L) 1300nm multimode

Fiber-optic Transmitter Power: min: -19.0 dBm max: -15.0 dBm
Fiber-optic Receiver Sensitivity: min: -34.0 dBm max: -14.0 dBm
Maximum Cable Distance: 5 kilometers (16,500 feet)

C/E-TBT-FRL-04 (MT) 850nm multimode

Fiber-optic Transmitter Power: min: -16.0 dBm max: -10.0 dBm
Fiber-optic Receiver Sensitivity: min: -29.5 dBm max: -7.2 dBm
Maximum Cable Distance: 2 kilometers (6,600 feet)

C/E-TBT-FRL-04 (SC) 850nm multimode

Fiber-optic Transmitter Power: min: -16.0 dBm max: -10.0 dBm
Fiber-optic Receiver Sensitivity: min: -29.5 dBm max: -7.2 dBm
Maximum Cable Distance: 2 kilometers (6,600 feet)

C/E-TBT-FRL-04 (SM) 1300nm singlemode - with ST connectors

Fiber-optic Transmitter Power: min: -23.0 dBm max: -14.0 dBm
Fiber-optic Receiver Sensitivity: min: -34.0 dBm max: -14.0 dBm
Typical Cable Distance*: 20 kilometers (66,000 feet)

C/E-TBT-FRL-04 (LH) 1300nm singlemode - with ST connectors

Fiber-optic Transmitter Power: min: -17.0 dBm max: -12.0 dBm
Fiber-optic Receiver Sensitivity: min: -34.0 dBm max: -14.0 dBm
Typical Cable Distance*: 20 kilometers (66,000 feet)

C/E-TBT-FRL-04 (XC) 1300nm singlemode - with SC connectors

Fiber-optic Transmitter Power: min: -23.0 dBm max: -14.0 dBm
Fiber-optic Receiver Sensitivity: min: -34.0 dBm max: -14.0 dBm
Typical Cable Distance*: 20 kilometers (66,000 feet)

*Actual distance dependent upon physical characteristics of network installation.

Copper Cable and Connector

Twisted pair connection requires two active pairs configured as straight through. The two active pairs in an Ethernet™ network are pins 1 & 2 and pins 3 & 6. Use only dedicated wire pairs (such as blue/white & white/blue, orange/white & white/orange) for the active pairs.

Category 3 or better twisted-pair copper wire is required. Either shielded twisted-pair (STP) or unshielded twisted-pair (UTP) can be used. DO NOT USE FLAT OR SILVER SATIN WIRE.

INSTALLATION

Install Slide-In-Module in E-MCC-1600 Chassis

NOTE: Media Converter Slide-in-Modules can be installed in any installation slot, in any order.

- Remove Media Converter Slide-in-Module protective plate from selected installation slot by removing two (2) screws that secure plate to front of E-MCC-1600 chassis.

- Carefully slide Media Converter Slide-in-Module into installation slot, aligning Media Converter Slide-in-Module with installation guides.

NOTE: Ensure that the Media Converter Slide-in-Module is firmly seated against the backplane.

- Secure Slide-in-Module by securing panel fastener screw attached to Slide-in-Module to E-MCC-1600 chassis.

Install Cable

NOTE: See pages 6 and 7 for cable specifications and configurations.

COPPER

EITHER STRAIGHT-THROUGH OR CROSSOVER CABLE CAN BE USED BETWEEN THE MEDIA CONVERTER AND A HUB, TERMINAL DEVICE, TRANSCEIVER, SWITCH, OR NETWORK INTERFACE CARD (NIC).

- Locate or build 10BASE-T-compliant cables with either straight-through or crossover configuration and with male RJ-45 plug connectors at both ends.
- Connect male RJ-45 plug connector at one end of cable to media converter RJ-45 jack connector.
- Connect male RJ-45 plug connector at other end of cable to 10BASE-T hub, terminal device, transceiver, switch, or network interface card (NIC) RJ-45 jack connector.

FIBER

- Locate or build 10BASE-FL-compliant fiber cable with male two-stranded TX to RX connectors at both ends.
- Connect male TX and RX cable connectors at one end of cable to TX and RX female connectors, respectively, on media converter.
- Connect male TX and RX cable connectors at other end of cable to RX and TX connectors of 802.3 compliant fiber device

OPERATION

After installation, the media converter should function without operator intervention.

Status LEDs

Use the status LEDs to monitor media converter operation in the network.

Link (near 10BASE-FL connector) Steady LED indicates good 10BASE-FL link and normal operation.

Dark LED indicates lack of power OR downed 10BASE-FL link.


RX (Receive - near 10BASE-FL connector) Flashing LED indicates data reception on 10BASE-FL link.

Link (near 10BASE-T connector) Steady LED indicates good 10BASE-T link and normal operation.

Dark LED indicates lack of power OR downed 10BASE-T link.

RX (Receive - near 10BASE-T connector) Flashing LED indicates data reception on 10BASE-T link.

P(o)w(e)r Steady LED indicates connection to external AC power.

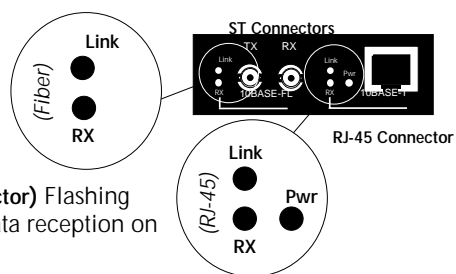

FAULT ISOLATION and CORRECTION

If the media converter fails, isolate and correct the fault by determining the answers to the following questions and then taking the indicated action:

1. Is the *P(ower)* LED on the media converter illuminated?

NO

- Is the power adapter the proper voltage and frequency for AC outlet? NOTE: Refer to "Power Supply Requirements" on page 7.
- Is the power adapter properly installed in the media converter and in the outlet?
- Contact Technical Support: (800) 260-1312/(800) LAN-WANS.

YES

- Proceed to step 2.

2. Is the 10BASE-T *Link* LED illuminated?

NO

- Check twisted pair cables for proper connection.
- Contact Technical Support: (800) 260-1312/(800) LAN-WANS.

YES

- Proceed to step 3.

3. Is the 10BASE-FL *Link* LED illuminated?

NO

- Check fiber cables for proper connection.
- Verify that TX and RX cables on media converter are connected to RX and TX ports, respectively, on other device.
- Contact Technical Support: (800) 260-1312/(800) LAN-WANS.

YES

- Proceed to step 4.

4. Is the 10BASE-T *RX* LED illuminated?

NO

- Disconnect and reconnect the 10BASE-T cable to restart the initialization process.
- Restart the attached device to restart the initialization process.
- Contact Technical Support: (800) 260-1312/(800) LAN-WANS.

YES

- Proceed to step 5.

5. Is the 10BASE-FL *RX* LED illuminated?

NO

- Disconnect and reconnect the 10BASE-FL cable to restart the initialization process.
- Restart the attached device to restart the initialization process.
- Contact Technical Support: (800) 260-1312/(800) LAN-WANS.

YES

- Contact Technical Support: (800) 260-1312/(800) LAN-WANS.