



User's Guide

SGETF10xx-10x

Stand-Alone Media Converter

- **Gigabit Ethernet**
- **Copper to Fiber**
- **1000Base-T to 1000Base-SX/LX**

Transition Networks SGETF10xx-10x gigabit Ethernet media converter connects 1000Base-T shielded or unshielded twisted-pair copper cable to 1000Base-SX or 1000Base-LX, fiber-optic cable.

Part Number	Port One - Copper	Port Two - Duplex Fiber-Optic
SGETF1013-105	RJ-45 1000Base-T 100 m (328 ft)*	SC, 1000Base-SX, 850 nm multimode 220 m (722 ft)* (62.5/125 μ m cable) 500 m (1,640 ft)* (50/125 μ m cable)
SGETF1014-105	RJ-45 1000Base-T 100 m (328 ft)*	SC, 1000Base-LX, 1310 nm single mode 10 km (6.2 miles)*
SGETF1015-105	RJ-45 1000Base-T 100 m (328 ft)*	SC, 1000Base-LX, 1310 nm single mode 25 km (15.5 miles)*
SGETF1017-105	RJ-45 1000Base-T 100 m (328 ft)*	SC, 1000Base-LX, 1550 nm single mode 65 km (40.4 miles)*
SGETF1018-105	RJ-45 1000Base-T 100 m (328 ft)*	MT-RJ, 1000Base-SX, 850 nm multimode 220 m (722 ft)* (62.5/125 μ m cable) 500 m (1,640 ft)* (50/125 μ m cable)
SGETF1024-105	RJ-45 1000Base-T 100 m (328 ft)*	SC, 1000Base-SX, 1300 nm extended multimode, 2 km (1.2 miles)* Note: 62.5/125 μ m (fiber only)
SGETF1035-105	RJ-45 1000Base-T 100 m (328 ft)*	SC, 1000Base-LX, 1550 nm single mode 125 km (77.5 miles)*
SGETF1039-105	RJ-45 1000Base-T 100 m (328 ft)*	LC, 1000Base-SX, 850 nm multimode 220 m (722 ft)* (62.5/125 μ m cable) 500 m (1,640 ft)* (50/125 μ m cable)

* Typical maximum cable distance. Actual distance is dependent upon the physical characteristics of the network installation.

NOTE: The chassis version of the media converter is CGETF10xx-10x. For more information, see the CGETF10xx-10x user's guide on-line at: www.transition.com.

Installation	3
Operation	5
Cable Specifications	8
Technical Specifications	9
Troubleshooting	10
Contact Us	11
Compliance Information	12

SGETF10xx-10x

Part Number	Port One - Copper	Port Two - Single Fiber-Optic
SGETF1029-105	RJ-45 1000Base-T 100 m (328 ft)*	SC, 1000Base-LX, 1310 TX/1550 RX single mode, 20 km (12.4 miles)*
SGETF1029-106	RJ-45 1000Base-T 100 m (328 ft)*	SC, 1000Base-LX, 1550 TX/1310 RX single mode, 20 km (12.4 miles)*
The SGETF1029-105 and the SGETF1029-106 are to be installed in the same network, where one is the local converter and the other is the remote converter.		
SGETF1029-107	RJ-45 1000Base-T 100 m (328 ft)*	SC, 1000Base-LX, 1310 TX/1550 RX single mode, 40 km (24.8 miles)*
SGETF1029-108	RJ-45 1000Base-T 100 m (328 ft)*	SC, 1000Base-LX, 1550 TX/1310 RX single mode, 40 km (24.8 miles)*
The SGETF1029-107 and the SGETF1029-108 are to be installed in the same network, where one is the local converter and the other is the remote converter.		

* Typical maximum cable distance. Actual distance is dependent upon the physical characteristics of the network installation. (TX = transmit, RX = receive)

Optional Accessories (sold separately).


Part Number	Description
SPS-1872-SA	Optional External Power Supply; 18-72VDC stand-alone Output: 12.6VDC, 1.0 A
SPS-1872-PS	Optional External Power Supply; 18-72VDC Piggy-back; Output: 12.6VDC, 1.0 A
E-MCR-04	12-Slot Media Converter Rack (includes universal internal power supply) 17 x 15 x 5 in. (432 x 381 x 127 mm)
WMBL	Optional Wall Mount Brackets; 4.7 in. (119 mm)
WMBV	Optional Vertical Mount Bracket; 5.0 in. (127 mm)
WMBD	Optional DIN Rail Mount Bracket; 5.0 in. (127 mm)
WMBD-F	Optional DIN Rail Mount Bracket (flat); 3.3in. (84 mm)

Installation

CAUTION: Wear a grounding device and observe electrostatic discharge precautions when setting the 4-position switch. **Failure to observe this caution could result in damage to, and subsequent failure of, the media converter.**

Set the 4-Position Switch

- The 4-position switch is located on the side of the media converter.
- Use a small flat blade screwdriver to set the recessed switches.

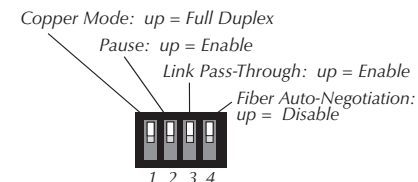

- Twisted-Pair Full/Half Duplex Mode
up = Full-Duplex on the copper link (See page 6).
down = Half-Duplex on the copper link (See page 6).
- Pause
up = Enable pause (See page 6).
down = Disable pause.
- Link Pass-Through
up = Enable Link Pass-Through (See page 7).
down = Disable Link Pass-Through.
- Fiber Auto-Negotiation
up = Disable Auto-Negotiation for the fiber link (default) (See page 7).
down = Enable Auto-Negotiation for the fiber link.

NOTE: If the SGETF10xx-10x is connected via fiber to another SGETF10xx-10x, both media converters must have the fiber Auto-Negotiation setting disabled (switch 4 = up). Otherwise, the fiber-linked media converters will never link up. (See page 7.)

When Fiber Auto-Negotiation is disabled (default setting):
Switches 1, 2 and 3 will function only if Fiber Auto-Negotiation is disabled. The settings for Twisted-Pair Full/Half Duplex, Pause, and Link Pass-Through can be set as needed using switches 1, 2 and 3.

To disable Fiber Auto-Negotiation:

- In hardware mode: #4 switch = up.
- In software mode: De-select the “Fiber Auto Negotiate” setting.

When Fiber Auto-Negotiation is enabled:

Switches 1, 2, and 3 will not function and the media converter adopts the settings for Twisted-Pair Full/Half Duplex, Pause, and Link Pass-Through from the media converter at the other end of the fiber cable.


To enable Fiber Auto-Negotiation:

- In hardware mode: #4 switch = down.
- In software mode: Select the “Fiber Auto Negotiate” setting.

Installation -- Continued


Install the fiber cable

1. Locate or build 1000Base-SX/LX compliant fiber cable with male, two-stranded TX to RX connectors installed at both ends.
2. Connect the fiber cables to the SGETF10xx-10x media converter as described:
 - Connect the male TX cable connector to the female TX port.
 - Connect the male RX cable connector to the female RX port.
3. Connect the fiber cables to the other device (*another media converter, hub, etc.*) as described:
 - Connect the male TX cable connector to the female RX port.
 - Connect the male RX cable connector to the female TX port.

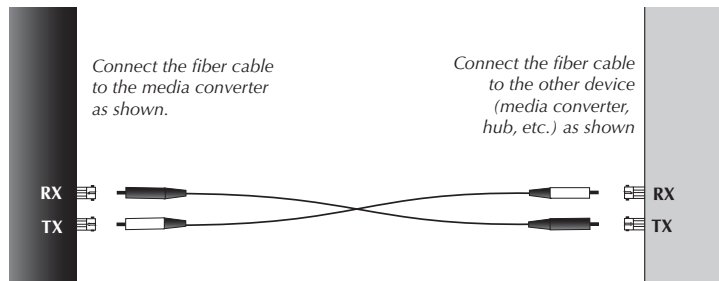

Install the copper cable

1. Locate or build 1000Base-T compliant copper cables with male, RJ-45 connectors installed at both ends.
2. Connect the RJ-45 connector at one end of the cable to the RJ-45 port on the SGETF10xx-10x media converter.
3. Connect the RJ-45 connector at the other end of the cable to the RJ-45 port on the other device (*switch, workstation, etc.*).

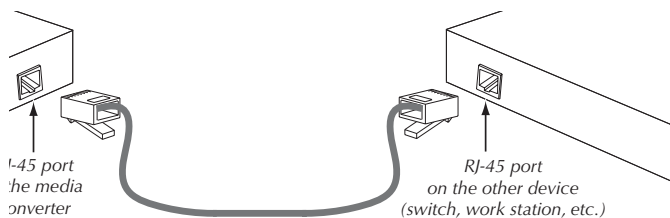

Installation -- Continued

Power the media converter

AC

The external power supply provided with this device is UL listed by the manufacturer of the power supply.

1. Install the power adapter cord to the back of the media converter.
2. Connect the power adapter plug to AC power.
3. Verify that the media converter is powered by observing the illuminated LED power indicator light.

DC


Consult the user's guide for the Transition Networks SPS1872-xx DC external power supply for powering the media converter.

Operation

Status LEDs

Use the status LEDs to monitor the SGETF10xx-10x media converter operation in the network.

PWR (<i>Power</i>)	ON = Connection to external AC power.
LKF (<i>Fiber link</i>)	ON = Fiber link connection.
LKC (<i>Copper link</i>)	ON = Copper link connection.
RXF (<i>Fiber receive</i>)	Flashing = Reception of data on the fiber link.
RXC (<i>Copper receive</i>)	Flashing = Reception of data on the copper link.

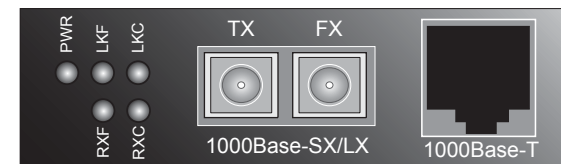

Operation -- Continued

Full-Duplex Network

In a full-duplex network, maximum cable lengths are determined by **the type of cables** that are used. See pages 1 and 2 for the cable specifications for the different SGETF10xx-10x models.

The 512-Bit Rule **does not apply** in a full-duplex network.

Half-Duplex Network (512-Bit Rule)

In a half-duplex network, the maximum cable lengths are determined by the round trip delay limitations of each Fast Ethernet **collision domain**. (A collision domain is the longest path between any two terminal devices, e.g. a **terminal, switch** or **router**.)

The 512-Bit Rule determines the maximum length of cable permitted by calculating the round-trip delay in **bit-times (BT)** of a particular collision domain. If the result is less than or equal to 512 BT, the path is good.

For more information on the 512-Bit Rule, see the white paper titled “*Collision Domains*” on the Transition Networks website at: www.transition.com.

Pause

The pause feature can improve network performance by allowing one end of the link to signal the other to discontinue frame transmission for a set period of time to relieve buffer congestion.

In Hardware mode, the pause feature can be set to

- Disable (*no pause*)
- Enable (*symmetrical pause*)

In Software mode, the pause feature can be set to one of four settings:


- Disable (i.e., no pause)
- Symmetrical pause
- Asymmetric TX (*transmit*) pause
- Asymmetric RX (*receive*) pause

Enable the pause feature if it is present on all network devices attached to the media converter(s). Otherwise, disable the pause feature.

Operation - Continued

Link Pass-Through

The Link Pass-Through feature allows the media converter to monitor both the fiber and copper RX (receive) ports for loss of signal. In the event of a loss of an RX signal (1), the media converter will automatically disable the TX (transmit) signal (2), thus, “passing through” the link loss (3). The far-end device is automatically notified of the link loss (4), which prevents the loss of valuable data unknowingly transmitted over an invalid link.

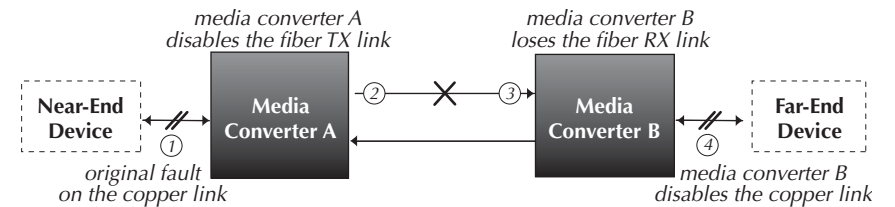

Fiber Auto-Negotiation

Fiber Auto-Negotiation allows the fiber interface to detect and subsequently advertise the support abilities from the remote device. This feature is supported only when the fiber is connected to a device with a negotiating port.

The Fiber Auto-Negotiation process is as follows:

1. The fiber interface detects the support abilities from the remote partner.
2. These abilities are passed to the twisted-pair interface and advertised.
3. Once the twisted-pair interface has a link at the highest common ability, it passes the result to the fiber interface.
4. The fiber interfaces then start advertising these abilities. At this point, the link between the fiber and the negotiating port is complete.

Because the start abilities are spawned from the receive-end of the fiber interface, fiber-linked media converters will never link if **both** have Fiber Auto-Negotiation enabled. Therefore, Fiber Auto-Negotiation has been disabled by default.

Cable Specifications

The physical characteristics must meet or exceed IEEE 802.3™ specifications.

Fiber Cable

Bit Error Rate:	<10 ⁻⁹
Single mode fiber (recommended):	9 μm
Multimode fiber (recommended):	62.5/125 μm
Multimode fiber (optional):	100/140, 85/140, 50/125 μm

SGETF1013-105	850 nm multimode
Fiber Optic Transmitter Power:	min: -10.0 dBm max: -4.0 dBm
Fiber Optic Receiver Sensitivity:	min: -17.0 dBm max: 0.0 dBm
Link Budget:	7.0 dB

SGETF1014-105	1310 nm single mode
Fiber-optic Transmitter Power:	min: -13.0 dBm max: -3.0 dBm
Fiber-optic Receiver Sensitivity:	min: -20.0 dBm max: -3.0 dBm
Link Budget:	7.0 dB

SGETF1015-105	1310 nm single mode
Fiber-optic Transmitter Power:	min: -5.0 dBm max: -0.0 dBm
Fiber-optic Receiver Sensitivity:	min: -20.0 dBm max: -3.0 dBm
Link Budget:	15.0 dB

SGETF1017-105	1550 nm single mode
Fiber-optic Transmitter Power:	min: -3.0 dBm max: +2.0 dBm
Fiber-optic Receiver Sensitivity:	min: -23.0 dBm max: -3.0 dBm
Link Budget:	20.0 dB

SGETF1018-105	850 nm multimode
Fiber Optic Transmitter Power:	min: -10.0 dBm max: -4.0 dBm
Fiber Optic Receiver Sensitivity:	min: -17.0 dBm max: -0.0 dBm
Link Budget:	7.0 dB

SGETF1024-105	1300 nm extended multimode
Fiber-optic Transmitter Power:	min: -10.0 dBm max: -3.0 dBm
Fiber-optic Receiver Sensitivity:	min: -17.0 dBm max: -3.0 dBm
Link Budget:	7.0 dB

SGETF1029-105	1310nm TX / 1550nm RX single mode
SGETF1029-106	1550nm TX / 1310nm RX single mode
Fiber-optic Transmitter Power:	min: -8.0 dBm max: +2.0 dBm
Fiber-optic Receiver Sensitivity:	min: -21.0 dBm max: -3.0 dBm
Link Budget:	13.0 dB

SGETF1029-107	1310nm TX / 1550nm RX single mode
SGETF1029-108	1550nm TX / 1310nm RX single mode
Fiber-optic Transmitter Power:	min: -3.0 dBm max: +2.0 dBm
Fiber-optic Receiver Sensitivity:	min: -23.0 dBm max: -8.0 dBm
Link Budget:	20.0 dB

SGETF1035-105	1550 nm single mode
Fiber-optic Transmitter Power:	min: 0.0 dBm max: +5.0 dBm
Fiber-optic Receiver Sensitivity:	min: -27.0 dBm max: -3.0 dBm
Link Budget:	27.0 dB

Cable Specifications -- Continued

Fiber Cable - (Continued)

SGETF1039-105	850 nm multimode
Fiber Optic Transmitter Power:	min: -9.0 dBm max: -4.0 dBm
Fiber Optic Receiver Sensitivity:	min: -17.0 dBm max: -17.0 dBm
Link Budget:	8.0 dB

Copper Cable (Category 5 -- minimum requirement)

- Gauge = 24 to 22 AWG; Attenuation = 22.0 dB/100m @ 100 MHz
- Straight-through OR crossover cable may be used.
- Shielded twisted-pair (STP) OR unshielded twisted-pair (UTP) may be used
- All pin pairs (1&2, 3&6, 4&5, 7&8) are active in a gigabit network.
- Use only dedicated wire pairs for the active pins:
(e.g., blue/white & white/blue, orange/white & white/orange, etc.)
- Do not use flat or silver satin wire.

Technical Specifications

For use with Transition Networks Model SGETF10xx-10x or equivalent

Standards:	IEEE 802.3ab™, IEEE 802.3™ 2000
Data rate /delay:	1000 Mb/s /300 nsec
Dimensions:	3.25" x 1.0" x 4.8" (82mm x 25mm x 122mm)
Weight:	10 oz. (283 g) approximately
Power consumption:	5.4W, 450mA @ 12VDC
Power supply:	12VDC, 0.8 Amp (North America, Europe, Japan, U.K.) 12VDC, 1.25 Amp (Australia, New Zealand, South Africa) 12VDC, 0.41 Amp (Latin America)
Packet size:	10 Kbytes (maximum)
MTBF:	48,000 hours (MIL217F2 V5.0) (MIL-HDBK-217F) 122,000 hours (Bellcore7 V5.0)
Operating temp:	0°C to 50°C (32°F to 122°F)
Storage temp:	-15°C to 65°C (5 to 149°F)
Humidity:	10% to 90%, non-condensing
Altitude:	0 to 10,000 feet
Warranty:	Lifetime

The information in this user's guide is subject to change. For the most up-to-date information on the SGETF10xx-10x media converter, view the user's guide on-line at: www.transition.com.

Product is certified by the manufacturer to comply with DHHS Rule 21/CFR, Subchapter J applicable at the date of manufacture.

CAUTION: Visible and invisible laser radiation when open. Do not stare into beam or view directly with optical instruments. Use of controls, adjustments or the performance of procedures other than those specified herein may result in hazardous radiation exposure.

The fiber optic transmitters on this device meet Class I Laser safety requirements per IEC-825/CDRH standards and comply with 21 CFR1040.10 and 21CFR1040.11.

Troubleshooting

If the media converter fails, isolate and correct the fault by determining the answers to the following questions and then taking the indicated action:

1. Is the PWR (*power*) LED illuminated?
 - NO
 - Is the power adapter the proper type of voltage and cycle frequency for the AC outlet?
 - Is the power adapter properly installed in the media converter and in the outlet?
 - Contact Tech Support: 1-800-260-1312, Int'l: 00-1-952-941-7600.
 - YES
 - Proceed to step 2.
2. Is the LKC (*copper link*) LED illuminated?
 - NO
 - Check the twisted-pair copper cables for proper connection.
 - Contact Tech Support: 1-800-260-1312, Int'l: 00-1-952-941-7600.
 - YES
 - Proceed to step 3.
3. Is the LKF (*fiber link*) LED illuminated?
 - NO
 - Check the fiber cables for proper connection.
 - Verify that the TX and RX cables on the media converter are connected to the RX and TX ports, respectively, on the other device.
 - If the media converter is connected to another SGETF10xx-10x using fiber, verify the fiber Auto Negotiate is disabled (*DIP-switch 4 in the UP position*).
 - Contact Tech Support: 1-800-260-1312, Int'l: 00-1-952-941-7600.
 - YES
 - Proceed to step 4.
4. Is the RXC (*copper receive*) LED flashing?
 - NO
 - If there is no activity on the 1000Base-T port, proceed to step 5.
 - If there is activity on the 1000Base-T port, disconnect and reconnect the twisted-pair copper cable to restart the initialization process.
 - Restart the workstation to restart the initialization process.
 - Contact Tech Support: 1-800-260-1312, Int'l: 00-1-952-941-7600.
 - YES
 - Proceed to step 5.
5. Is the RXF (*fiber receive*) LED flashing?
 - NO
 - If there is no activity on the 1000Base-SX/LX port, continue below
 - If there is activity on the 1000Base-SX/LX port, disconnect and reconnect the fiber cable to restart the initialization process.
 - Restart the workstation to restart the initialization process.
 - Contact Tech Support: 1-800-260-1312, Int'l: 00-1-952-941-7600.
 - YES
 - Contact Tech Support: 1-800-260-1312, Int'l: 00-1-952-941-7600.

Contact Us

Technical support

Technical support is available 24-hours a day
 US and Canada: 1-800-260-1312
 International: 00-1-952-941-7600

Transition now

Chat live via the Web with Transition Networks Technical Support.
 Log onto www.transition.com and click the Transition Now link.

Web-based seminars



Transition Networks provides seminars via live web-based training.
 Log onto www.transition.com and click the Learning Center link.

E-Mail

Ask a question anytime by sending an e-mail to our technical support staff.
techsupport@transition.com

Address

Transition Networks
 6475 City West Parkway
 Minneapolis, MN 55344, USA
 Telephone: 952-941-7600
 Toll free: 800-526-9267
 Fax: 952-941-2322

 Declaration of Conformity	
Name of Mfg:	Transition Networks 6475 City West Parkway, Minneapolis MN 55344 USA
Model:	SGETF10xx-10x Series Media Converters
Part Number(s):	SGETF1013-105, SGETF1014-105, SGETF1015-105, SGETF1017-105, SGETF1018-105, SGETF1024-105, SGETF1029-105, SGETF1029-106, SGETF1035-105, SGETF1029-107, SGETF1029-108, SGETF1039-105
Regulation:	EMC Directive 89/336/EEC
Purpose:	To declare that the <i>SGETF10xx-10x</i> to which this declaration refers is in conformity with the following standards. CISPR 22:1993; EN 55022:1998 Class A; FCC Part 15 Subpart B; EN 55024:1998; 21CFR subpart J; EN 61000-2-3:1995; EN61000-3-3:1995; I, the undersigned, hereby declare that the equipment specified above conforms to the above Directive(s) and Standard(s).
 Stephen Anderson, Vice-President of Engineering	
July 15, 2005 Date	

Compliance Information

CISPR22/EN55022 Class A + EN55024

CE Mark

FCC regulations

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at the user's own expense.

Canadian regulations

This digital apparatus does not exceed the Class A limits for radio noise for digital apparatus set out on the radio interference regulations of the Canadian Department of Communications. Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la Class A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

European regulations

Warning

This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Achtung !

Dieses ist ein Gerät der Funkstörgrenzwertklasse A. In Wohnbereichen können bei Betrieb dieses Gerätes Rundfunkstörungen auftreten. In diesem Fall ist der Benutzer für Gegenmaßnahmen verantwortlich.

Attention !

Ceci est un produit de Classe A. Dans un environnement domestique, ce produit risque de créer des interférences radioélectriques, il appartiendra alors à l'utilisateur de prendre les mesures spécifiques appropriées.



CAUTION: RJ connectors are NOT INTENDED FOR CONNECTION TO THE PUBLIC TELEPHONE NETWORK. Failure to observe this caution could result in damage to the public telephone network.

Der Anschluss dieses Gerätes an ein öffentliches Telekommunikationsnetz in den EG-Mitgliedstaaten verstösst gegen die jeweiligen einzelstaatlichen Gesetze zur Anwendung der Richtlinie 91/263/EWG zur Angleichung der Rechtsvorschriften der Mitgliedstaaten über Telekommunikationsendeinrichtungen einschliesslich der gegenseitigen Anerkennung ihrer Konformität.

Trademark notice

All trademarks and registered trademarks are the property of their respective owners.

Copyright restrictions

© 2003-2005 Transition Networks.

All rights reserved. No part of this work may be reproduced or used in any form or by any means - graphic, electronic or mechanical - without written permission from Transition Networks.